


CL03-0010 (SUSPENDED)



KEY FEATURES

- Die-cast end caps
- Double locking diffusers
- Three diffuser types, Clear Prism, Opal Prism and Clear
- Extruded gear tray with high thermal transfer
- Sliding suspensions in extruded channels
- Direct lighting or direct and indirect
- Colour matched capping for infills and sensor mounting
- Custom lengths between 1074mm to 2824mm (70mm increments)

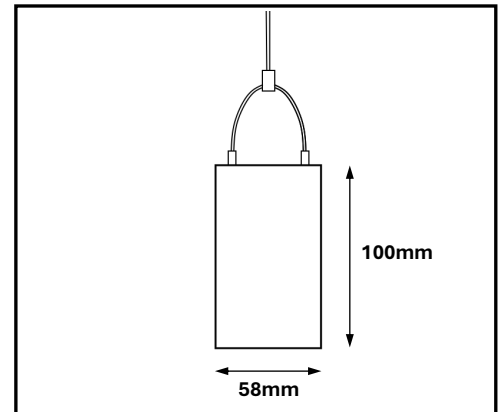

APPLICATIONS

Offices, Retail, Hospitality and Education

SPECIFICATION

Distribution	Direct Indirect Direct + Indirect
Colour Temperature CCT	2700K 3000K 4000K 5000K 6000K
Diffuser Type	Clear Opal Prism Transparent Prism
Diffuser Test	Glow Wire Test 650°C
RAL Paint Colour	9016 White 9010 White 9005 Black Any
Efficacy	Up to 185 lm/W
CRI	>80 >90
MacAdam Step	3 SDCM
Controls	On/Off Dali-2 Casambi BT Mesh
Installation (Family)	Suspended Recessed Surface



Dimensions	W 58mm x H100mm
Standard Lengths	1074mm to 2824mm (70mm increments)
System Pieces	Individual Start/End Middle
Body Material	6063 Grade Aluminium Alloy
Ingress Protection	IP40
Impact Rating	IK05
Operating Voltage	220-240V 50/60Hz
Emergency Options	Standard / Dali Reporting
Lifetime L70B50	100,000 Hours
Operating Temperature	0°C - 30°C
Weight	2.5kg p/m
Warranty	5 years (Subject to Conditions)